

fiber options


OH-TT-4-XXXX-XXXX Fiber SFP Data Sheet

Dual Channel 3Gbit SDI Optical Transmitter - CWDM

- Dual channel SDI multi-rate optical transmitter for 3G-SDI, HD-SDI and SD-SDI signals
- Support for SMPTE 424M, SMPTE 292M, SMPTE 259M, DVB-ASI
- 9 wavelength "pair" selections according to ITU-T G694.2
- Distances up to 40km** (singlemode)
- For use with yellobrik and Series 5000 product lines
- Pluggable and hot swappable
- LC Duplex connector - singlemode
- Lead free and RoHS compliant

The OH-TX-4-XXXX-XXXX dual channel SDI optical transmitter is a CWDM fiber plug in option for select LYNX Technik yellobrik and Series 5000 products. This SFP module facilitates the conversion of two electrical SDI signals into optical signals for transmission over two fiber links. 9 wavelength "pairs" (18 wavelength) selections are available for CWDM applications and support for distances of up to 40km** is provided. The module supports 270Mbit / 1.485Gbit and 2.97Gbit SDI signals conforming to SMPTE 424M, 292M, 259M and DVB-ASI.

A socket, or "cage" is provided for the SFP in the supporting LYNX product for easy installation or upgrade. The SFP is hot swappable.

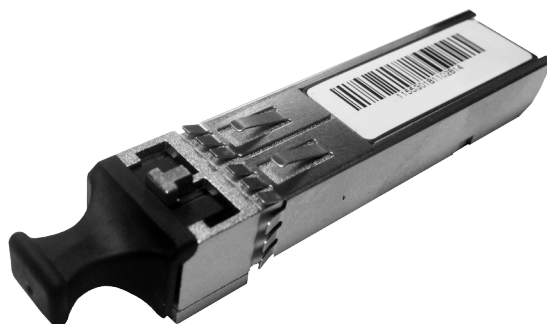

Shown with dust cap fitted

Specifications (each channel)

Parameter		Min	Typ	Max
Intrinsic Jitter (ps)	2.97 Gb/s	-	45	80
	1.485 Gbit/s	-	45	80
	270 Mbit/s	-	45	80
Wavelengths [18 according to ITU-T G694.2]		$\lambda - 10\text{nm}$	λ	$\lambda + 10\text{nm}$
Optical Power		-4dBm	-1dBm	+2dBm
Distance		-	40km**	-
Linear Extinction Ratio		5.0	8.0	-
Operating Temperature Range		5°C	-	40°C
Power Supply Voltage		3.1 VDC	3.3 VDC	3.5VDC
Power Consumption		-	260 mA	400 mA
Humidity (non condensing)		-	-	90%

λ =1270/1290/1310/1330/1350/1370/1390/1410/1430/1450/1470/1490/1510/1530/1550/1570/1590/1610nm
Pairing: [270-1290], [1310-1330], [1350-1370], [1390-1410], [1430-1450], [1470-1490], [1510/1530], [1550-1570], [1590-1610]

Mechanical

Parameter	
Size (not including connector - typ)	57mm x 13.4mm x 12.4mm
Weight	50g
SFP Connector pinning	Proprietary
Fiber connections	LC / Duplex - singlemode

Country of manufacture: Taiwan

Ordering Information

EAN / UPC	Model	Description
4250479327290	OH-TX-4-1270-1290	Dual 3G SDI Fiber Transmitter CWDM - 1270+1290nm
4250479331334	OH-TX-4-1310-1330	Dual 3G SDI Fiber Transmitter CWDM - 1310+1330nm
4250479353370	OH-TX-4-1350-1370	Dual 3G SDI Fiber Transmitter CWDM - 1350+1370nm
4250479339415	OH-TX-4-1390-1410	Dual 3G SDI Fiber Transmitter CWDM - 1390+1410nm
4250479343450	OH-TX-4-1430-1450	Dual 3G SDI Fiber Transmitter CWDM - 1430+1450nm
4250479347496	OH-TX-4-1470-1490	Dual 3G SDI Fiber Transmitter CWDM - 1470+1490nm
4250479351530	OH-TX-4-1510-1530	Dual 3G SDI Fiber Transmitter CWDM - 1510+1530nm
4250479355576	OH-TX-4-1550-1570	Dual 3G SDI Fiber Transmitter CWDM - 1550+1570nm
4250479359611	OH-TX-4-1590-1610	Dual 3G SDI Fiber Transmitter CWDM - 1590+1610nm

** Distance is an approximation. Actual distances achieved can be longer or shorter depending on the type of fiber cable and accumulated optical losses in the fiber link. Determine link losses and perform optical budget calculations to ensure correct operation.

WARNING

These SFP modules are Class 1 laser devices which comply to IEC825 and FDA 21 CFR 1040.10 and 1040.11. The device must be operated within specified temperature and voltage limits. The optical ports of the module must always be terminated with an optical connector or a dust plug (dust plug supplied)



Rev 1.0 Specifications subject to change

LYNXTechnik AG

www.lynx-technik.com

LYNX Technik AG
Brunnenweg 3
D-64331 Weiterstadt
Germany
PH +49 (0) 6150 1817 0
info@lynx-technik.com

LYNX Technik Inc
26366 Ruefher Ave.
Santa Clarita, CA 91350
USA
PH +1 (661) 251 8600
infoasia@lynx-technik.com

LYNX Technik Pte Ltd
19 Burn Road
#01-01 Advance Building
Singapore, 369974
PH +65 648 1622
infoasia@lynx-technik.com