

18 Channel CWDM Optical MUX/DEMUX**Description**


The OCM 5818 is an 18 channel CWDM passive optical multiplexer and/or de-multiplexer. This module allows the combination of up to 18 optical signals into a single unidirectional or bi-directional fiber link.

This version of the module supports all 18 wavelengths as specified in the ITU standard CWDM channel spacing grid (ITU-T G.694.2) namely 1270nm through 1610nm wavelengths.



The module is passive in operation, meaning it requires no power, and is mechanically compatible with all Series 5000 rack frames and installs from the rear of the rack.

Features

- Mux and / or Demux up to 18 optical signals
- ITU standard wavelength divisions: ITU-T 694.2
- Passive operation
- Compatible with all Series 5000 rack frames (2RU and 1RU)
- Occupies one card slot
- LC - PC connectors (singlemode)

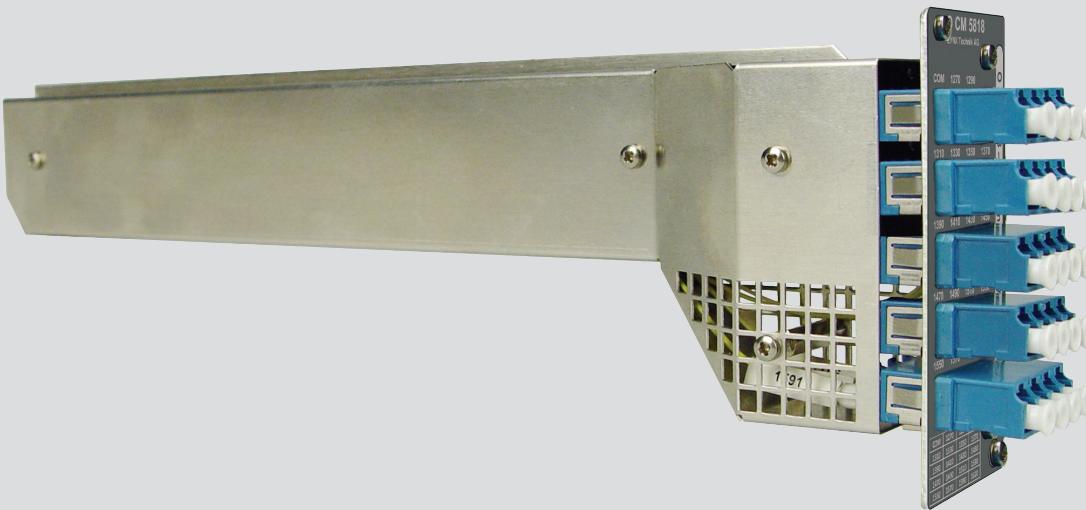

OCM 5818 - 18 Channel CWDM Optical Multiplexer

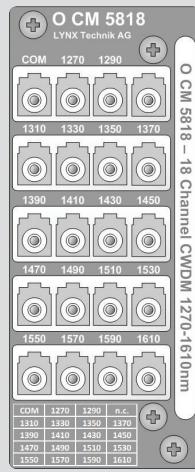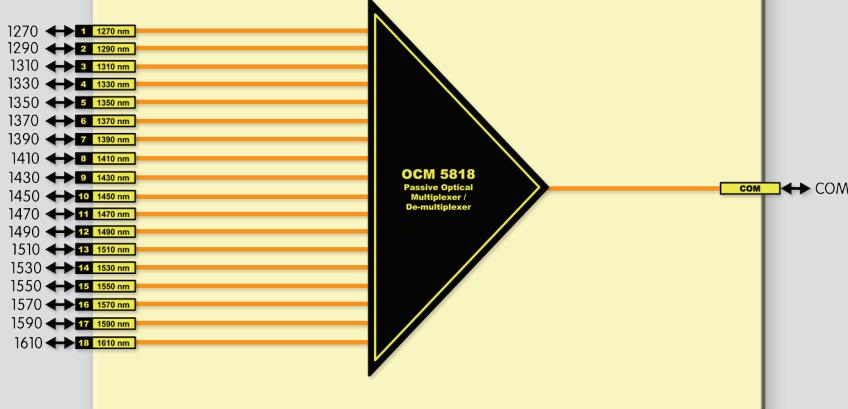


Backplane

Specifications

Optical I/O		Mechanical	
Optical I/O Ports	18 (Wavelength Specific)	Size	85mm x 286mm (not incl. connectors)
Supported I/O Wavelengths (ITU-T G694.2)	1270nm, 1290nm, 1310nm, 1330nm, 1350nm, 1370nm, 1390nm, 1410nm, 1430nm, 1450nm, 1470nm, 1490nm, 1510nm, 1530nm, 1550nm, 1570nm, 1590nm, 1610nm	Weight	190 g
COM Port	Common I/O port (Primary I/O with combined optical signals)	Ambient	
Connector Type	LC - PC (singlemode)	Temperature	-20°C to 85°C Maintaining specifications
Performance		Humidity	90% Max non condensing
Channel insertion loss	5.0dB	Specifications subject to change	
Polarization dependant loss	max 0.2dB		
Return Loss	> 45dB		
Isolation (To adjacent channel)	> 30dB		
Directivity	> 55dB		
Temperature dependant loss	< 0.005 dB / °C		
Temperature dependant change of wavelength	< 0.003 nm / °C		
Max input power	500mw		

Application

Two OCM 5818 modules used for a 18 channel bi-directional fiber transmission system.

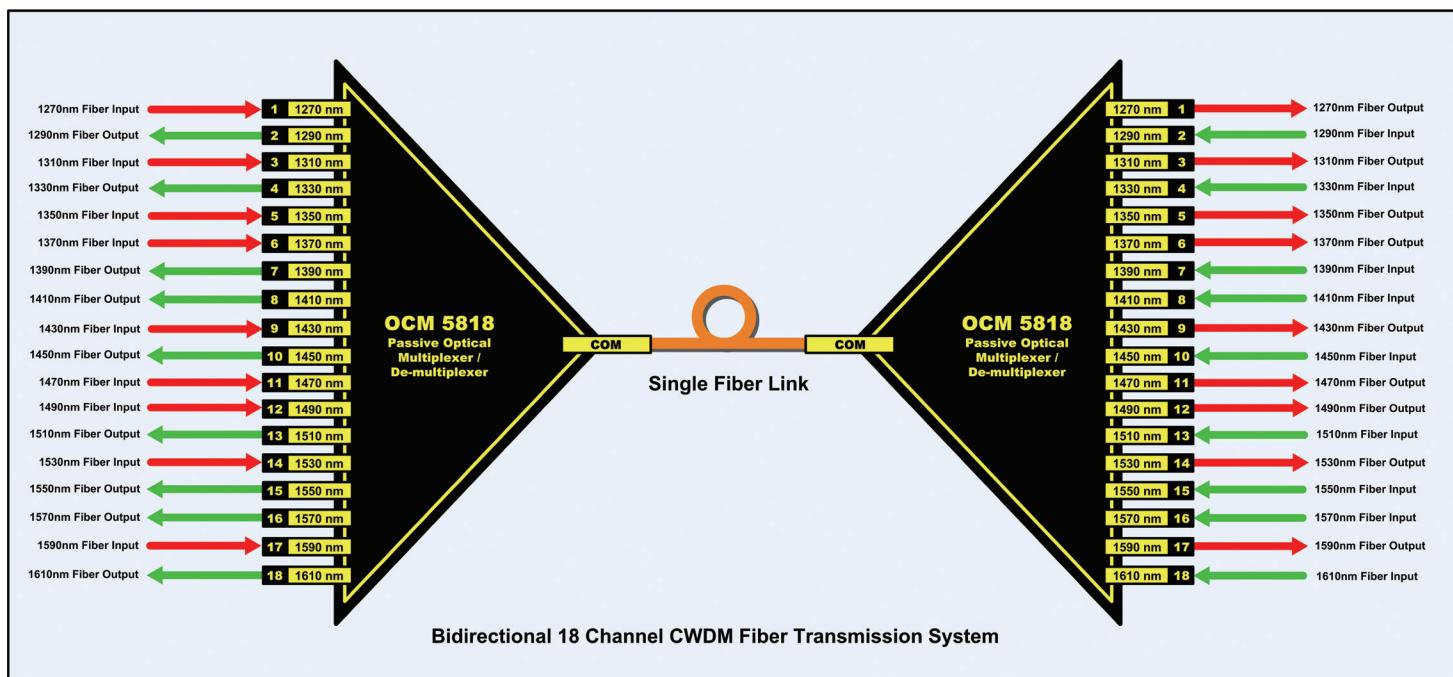

Note: the mix of TX and RX channels in the bi-directional link is determined by the location of the transmitter and receiver modules. This can be any combination

Ordering Information

Model #	Part Number	Description	Includes
O CM 5818	1000005818	18 Channel CWDM Multiplexer / De-multiplexer	CardModule + Mounting Screws + Reference Manual (on CD)